


Jute Center


Traveling Cable Type ETT , 300V , UL LISTED , CSA CERTIFIED , NEC/CEC COMPLIANT



MEGA Stock Code	Description of Conductors	Max. Hang Length, ft	Nom O.D (inches)	Net Wt./1000'	O.E.M Cross Reference
J 10-18	10#18 AWG	200	0.54	160	20417225 / 18-410-01
J 20-18	20#18 AWG	200	0.71	266	20417234 / 18-420-01
J 30-18	30#18 AWG	200	0.82	378	20417228 / 18-430-01
J 40-18	40#18 AWG	200	0.92	475	20417227 / 18-440-01

Jute Center Shielded Pairs

Traveling Cable Type ETT , 300V , UL LISTED , CSA CERTIFIED , NEC/CEC COMPLIANT



MEGA Stock Code	Description of Conductors	Max. Hang Length, ft	Nom O.D (inches)	Net Wt./1000'	O.E.M Cross Reference
JCC 4x20SH	4 shielded pairs/20 AWG	200	0.79	270	20417146 / 18-102-28
JCC 8x20SH	8 shielded pairs/20 AWG	200	1	420	20417159 / 18-008-14

ELH 36-060
Flexi Peeler round cable stripper



ELH 36-146
Super Peeler round cable stripper



ELH 36-177
SockSlicerTM



ELH 17-05-0001
QuickStrip wire stripper




ELH 36-219
Automatic wire stripper



Note: Product photos are for reference only.

Jute Center Combination

Traveling Cable Type ETT , 300V , UL LISTED , CSA CERTIFIED , NEC/CEC COMPLIANT




MEGA Stock Code	Description of Conductors	Max. Hang Length, ft	Nom O.D (inches)	Net Wt./1000'	O.E.M Cross Reference
JC 27	3#14 + 20#18 + 2#20SHPR	200	0.94	466	20417230 / 18-027-02
JC 33	3#14 + 22#18 + 4SHPR	200	1.23	719	20417238 / 18-322-05
JC 38W	12#14 + 18#18 + 4#20SHPR	200	1.25	806	20417145/18-038-02
JC 38SP	8#14 + 24#18 + 3#20SHPR	200	1.25	777	20417153 / 18-838-02
JC 45	4#14 + 39#18 + 1#20SHPR	200	0.99	617	20417139/18-032-99
JC 45D	4#14 + 31#18 + 5#20SHPR	200	1.31	805	20417239/18-045-02
JC 55D	4#14 + 41#18 + 5#20SHPR	200	1.39	917	20417242 / 18-055-02
JC 59	4#14 + 49#18 + 3#20SHPR	200	1.22	872	20417251 / 18-059-02
JC 60	4#14 + 54#18 + 1#20SHPR	200	1.26	855	20417252 / 18-454-02
JC 66	4#14 + 56#18 + 3#20SHPR	200	1.33	955	20417254 / 18-456-02
JC X 66-6	15#14 + 32#18 + 9#20SHPR + 1CX	200	1.68	1345	20417163 / 18-X66-02
JC 73	6#14 + 61#18 + 3#20SHPR	200	1.35	1042	20417151 / 18-073-02
JC 73LVM	12#14 + 53#18 + 4#20SHPR	200	1.43	1118	20417156 / 18-173-05
JC 740	12#14 + 53#18 + 4#20SHPR + 1CX	200	1.47	1200	20417160 / 18-174-05
JC 79SP	7#14 + 64#18 + 4#20SHPR	200	1.45	1200	20417143 / 18-764-05
JC 86	4#14 + 76#18 + 3#20SHPR	200	1.39	1128	20417140 / 18-476-02
JC 90	4#14 + 76#18 + 5#20SHPR	200	1.49	1247	20417130 / 18-490-02
JC 96C	4#14 + 90#18 + 1#20SHPR	200	1.42	1240	20417152 / 18-496-02

SP: denotes special color coding and/or conductor numbering.

Note: Product photos are for reference only.

Steel Center

Traveling Cable Type ETT , 300V , UL LISTED , CSA CERTIFIED , NEC/CEC COMPLIANT



MEGA Stock Code	Conductors Description	Steel Core Diameter In.	Max. Hang Length-ft	Cable Nom. OD Inches	Cable Net Wt. Per 1,000'	O.E.M Cross Reference
WS 4-14	4#14 AWG	3/32	900	0.57	166	20417164 / 18-004-11
WS 8-14	8#14 AWG	1/8	900	0.7	293	20417166 / 18-008-11
WS 15-14	15#14 AWG	1/8	900	0.93	487	20417170 / 18-015-11
WS 10-18	10#18 AWG	3/32	900	0.56	175	20417167 / 18-310-11
WS 20-18	20#18 AWG	3/32	804	0.71	286	20417086 / 18-420-11
WS 30-18	30#18 AWG	1/8	900	0.83	417	20417093 / 18-430-11
WS 40-18	40#18 AWG	1/8	900	0.92	509	20417087 / 18-440-11
WS 50-18	50#18 AWG	1/8	795	1.01	629	20417094 / 18-450-11

Steel Center Shielded Pairs

Traveling Cable Type ETT , 300V , UL LISTED , CSA CERTIFIED , NEC/CEC COMPLIANT



MEGA Stock Code	Conductors Description	Steel Core Diameter In.	Max. Hang Length-ft	Cable Nom. OD Inches	Cable Net Wt. Per 1,000'	O.E.M Cross Reference
WSCC 4X20SH	4#20SHPR	1/8	900	0.79	330	20417099 / 18-002-15
WSCC 6X20SH	6#20SHPR	1/8	900	0.85	363	20417101 / 18-003-15
WSCC 8X20SH	8#20SHPR	5/32	900	1	490	20417112 / 18-004-15
WSCC 6X18SH	6#18SHPR	5/32	900	0.93	418	20417102 / 18-403-15
WSCC 14X18SH	14#18SHPR	5/32	714	1.44	981	20417113 / 18-407-15

ELH 36-060
Flexi Peeler round cable stripper

ELH 36-146
Super Peeler round cable stripper

ELH 36-177
SockSlicer™

ELH 17-05-0001
QuickStrip wire stripper


ELH 36-219
Automatic wire stripper



Note: Product photos are for reference only.

Steel Center Combination

Traveling Cable Type ETT , 300V , UL LISTED , CSA CERTIFIED , NEC/CEC COMPLIANT



MEGA Stock Code	Conductors Description	Steel Core Diameter In.	Max. Hang Length-ft	Cable Nom. OD Inches	Cable Net Wt. Per 1,000'	O.E.M Cross Reference
CWS 19SP-SR	4#14 + 7#18 + 4#20SHPR	1/8	900	0.91	454	18-019-12
CWS 37	4#14 + 31#18 + 1#20SHPR	5/32	900	1.18	700	20417133 / 18-431-12
CWS 44	14#14 + 24#18 + 3#20SHPR	5/32	753	1.33	929	20417442 / 18-044-12
CWS 45D	4#14 + 31#18 + 5#20SHPR	5/32	776	1.31	902	20417127 / 18-045-12
CWS 47LO	11#14 + 22#18 + 7#20SHPR	5/32	695	1.4	1012	20417435 / 18-47L-12
CWS 51	4#14 + 45#18 + 1#20SHPR	5/32	878	1.2	797	18-445-12
CWS 55*	20#14 + 35#18	1/4	900	1.34	1153	18-155-12
CWS 58-LO	4#14 + 40#18 + 7#20SHPR	5/32	622	1.51	1125	20417137 / 18-L58-12
CWS 58-HI	4#14 + 40#18 + 7#20SHPR	5/32	622	1.51	1125	20417128 / 18-H58-12
CWS 59	4#14 + 49#18 + 3#20SHPR	5/32	791	1.22	885	20417134 / 18-059-12
CWS 60	7#14 + 27#18 + 13#20SHPR	1/4	900	1.58	1289	20417420 / 18-X60-12
CWS 73	6#14 + 61#18 + 3#20SHPR	5/32	608	1.39	1151	20417419 / 18-073-12
CWS 74	20#14 + 38#18 + 8#20SHPR	5/32	491	1.54	1426	20417443 / 18-X74-12
CWS 75	4#14 + 69#18 + 1#20SHPR	5/32	663	1.38	1056	20417129 / 18-469-12
CWS 81	8#14 + 59#18 + 7#20SHPR	5/32	524	1.6	1336	20417430 / 18-881-12
CWS 90	6#14 + 80#18 + 2#20SHPR	5/32	555	1.46	1262	20417431 / 18-X90-12
CWS 94	12#14 + 70#18 + 6#18SHPR	1/4	900	1.68	1663	20417374 / 18-X94-12
CWS 96	86#18 + 5#20SHPR	5/32	576	1.42	1215	20417117 / 18-096-12

LO: standard numbering

HI: high number marking

NOTE: * matching hoistway cable available

ELH 36-060
Flexi Peeler round cable stripper



ELH 36-146
Super Peeler round cable stripper



ELH 36-177
SockSlicer™



ELH 17-05-0001
QuickStrip wire stripper




ELH 36-219
Automatic wire stripper



Note: Product photos are for reference only.

Steel Center Combination With Coax

Traveling Cable Type ETT , 300V , UL LISTED , CSA CERTIFIED , NEC/CEC COMPLIANT



MEGA Stock Code	Conductors Description	Steel Core Diameter In.	Max. Hang Length-Ft	Cable Nom. OD Inches	Cable Net Wt. Per 1,000'	O.E.M Cross Reference
CSX 5	3#14 + 2COAX	5/32	900	1.33	500	20417447 / 18-X05-13
CSX 9	4#14 + 2#20SHPR + 1COAX	5/32	600	0.87	370	20417446 / 18-309-13
CSX 14	6#20SHPR + 2COAX	5/32	600	1.06	570	20417398 / 18-214-13
CSX 18-6	8#20SHPR + 2RG6COAX	5/32	600	1.24	710	20417406 / 18-X18-13
CSX 28*	13#20SHPR + 2RG6COAX	5/32	871	1.38	803	20417400 / 18-128-13
CSX 36	17#14 + 8#20SHPR + 3COAX	1/4	900	1.61	1271	20417448 / 18-X36-13
CSX 46	11#14 + 22#18 + 6#20SHPR + 1COAX	5/32	683	1.44	1025	20417401 / 18-X46-13
CSX 47*	4#14 + 30#18 + 6#20SHPR + 1COAX	5/32	740	1.35	946	20417473 / 18-X47-13
CSX 470	8#14 + 30#18 + 4#20SHPR + 1COAX	5/32	642	1.41	1090	20417390 / 18-247-13
CSX 48-LO*	6#14 + 25#18 + 8#20SHPR + 1RG6CX	5/32	726	1.37	963	20417391 / 18-L48-13
CSX 48-HI*	6#14 + 25#18 + 8#20SHPR + 1RG6CX	5/32	726	1.37	963	20417388 / 18-H48-13
CSX 53	4#14 + 45#18 + 1#20SHPR + 2RG6CX	5/32	711	1.34	985	20417459 / 18-X53-13
CSX 55	4#14 + 46#18 + 2#20SHPR + 1COAX	5/32	792	1.21	883	20417466 / 18-X55-13
CSX 55SP-HI	26#18 + 14#20SHPR + 1COAX	5/32	649	1.5	1079	20417453 / 18-855-13
CSX 57*	4#14 + 40#18 + 6#20SHPR + 1COAX	5/32	612	1.53	1144	20417471 / 18-X57-13
CSX 61	7#14 + 27#18 + 13#20SHPR + 1COAX	1/4	900	1.65	1373	20417380 / 18-X61-13
CSX 62SP	12#14 + 29#18 + 10#20SHPR + 1RG6CX	5/32	525	1.59	1334	20417402 / 18-X62-13
CSX 69	5#14 + 40#18 + 11#20SHPR + 2RG6CX	1/4	900	1.57	1340	20417481 / 18-X69-13
CSX 750*	20#14 + 38#18 + 8#20SHPR + 1COAX	1/4	900	1.58	1472	20417403 / 18-175-13
CSX 75T	8#14 + 54#18 + 6#20SHPR + 1COAX	5/32	542	1.58	1290	20417389 / 18-175-13
CSX 77	4#14 + 69#18 + 1#20SHPR + 2RG6CX	5/32	532	1.64	1315	20417468 / 18-377-13
CSX 77S*	4#14 + 60#18 + 6#20SHPR + 1COAX	1/4	900	1.52	1269	20417460 / 18-X77-13
CSX 83*	20#14 + 35#18 + 13#20SHPR + 2RG6CX	1/4	900	1.92	1808	20417405 / 18-083-13

SP: denotes special color coding and/or conductor numbering.

LO: standard numbering

HI: high number marking

NOTE: * matching multi-cable available

ELH 36-060
Flexi Peeler round cable stripper

ELH 36-146
Super Peeler round cable stripper

ELH 36-177
SockSlicer™

ELH 17-05-0001
QuickStrip wire stripper

ELH 36-219
Automatic wire stripper



Note: Product photos are for reference only.


Round Cable Hanging System

MEGA Stock Code	Steel Core Diameter Inches	Number of Cables Held	Max. per Cable load lbs.
ELK3/32-1 SBKT	3/32	1 cable	500
ELK1/8-1 SBKT	1/8	1 cable	500
ELK5/32-1 SBKT-R	5/32	1 cable	700
ELK1/4-1 SBKT	1/4	1 cable	1750

The Universal Hanging System is based around our patented Steel-Core Hanging Device which is designed to solidly grip and support the steel wire support member. It also safely secures the cable to the welded steel bracket thus preventing rotation.

The Universal Hanging System is a safe and effective unit that saves time and labor. It also has the added benefit of not having to bend (and possibly compromise) the steel support as required in other termination methods.

The Universal Hanging System is available in one and two cable configurations and comes as a kit with all installation hardware. Order two kits per cable, one for the car and one for the hoistway.

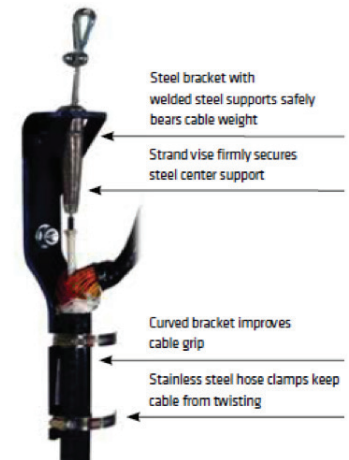


Round Cable Hanging System For 2 Cables

MEGA Stock Code	Steel Core Diameter Inches	Number of Cables Held	Max. per Cable load lbs.
ELK5/32-2 SBKT-R	5/32	2 cable	700
ELK1/4-2 SBKT	1/4	2 cable	1750



Jute Core Cable Hanger For Mesh Grips

MEGA Stock Code	Description
ELKHGRJC-8	Bracket used to hold/support grips that hold jute core cables - 8 in.



Beam Protection Pads

MEGA Stock Code	Description
BP1212	12"W x 12"H Protection Pads
BP1218	12"W x 18"H Protection Pads
BP1818	18"W x 18"H Protection Pads
BP1824	18"W x 24"H Protection Pads
BP2424	24"W x 24"H Protection Pads



Note: Product photos are for reference only.

Mesh Grips - Single Eye / Single Weave / Split Rod - Tinned Bronze

MEGA Stock Code	Cable Diameter Range Inches	Maximum Load lbs.	Eye Length Inches	Nom. Mesh Length Inches
ELH022-03-061	.37 to .49	106	4	4
ELH022-03-013	.37 to .49	106	7	7
ELH022-03-014	.63 to .74	158	8	8
ELH022-03-015	.75 to .99	204	8	8
ELH022-03-017	1.00 to 1.24	322	9	9
ELH022-03-018	1.25 to 1.49	322	10	10
ELH022-03-019	1.50 to 1.74	322	12	12
ELH022-03-020	1.75 to 1.99	430	14	14



Mesh Grips - Single Eye / Single Weave / Split Rod - Stainless Steel

MEGA Stock Code	Cable Diameter Range Inches	Maximum Load lbs.	Eye Length Inches	Nom. Mesh Length Inches
ELH024-03-014	.63 to .74	410	8	8.5
ELH024-03-015	.75 to .99	410	8	10.5
ELH024-03-017	1.00 to 1.24	530	9	12.5
ELH024-03-018	1.25 to 1.49	900	10	14.5
ELH024-03-019	1.50 to 1.74	900	12	15.5



Mesh Grips - Double Eye / Single Weave / Split Rod - Stainless Steel

MEGA Stock Code	Cable Diameter Range Inches	Maximum Load lbs.	Eye Length Inches	Nom. Mesh Length Inches
ELH024-03-005	1.00 to 1.24	530	5	12.5
ELH024-03-006	1.25 to 1.49	900	5	14.5
ELH024-03-007	1.50 to 1.74	900	5	15.5
ELH024-03-008	1.75 to 2.00	1200	6	16.5



Mesh Grips - Double Eye/ Double Weave / Closed Mesh - Stainless Steel

MEGA Stock Code	Cable Diameter Range Inches	Maximum Load lbs.	Eye Length Inches	Nom. Mesh Length Inches
ELH024-20-1504	1.00 to 1.24	1200	12	14
ELH024-20-1470	1.25 to 1.49	1640	12	15
ELH024-20-1510	1.50 to 1.74	1660	12	17
ELH024-20-1499	1.75 to 1.99	1800	12	19
ELH024-20-1542	2.00 to 2.50	1800	12	21




Note: Product photos are for reference only.

Big-Hoss Hoistway Obstruction Shield System

MEGA Stock Code	Description
BIG-HOSS	Hardware Cloth Base Mounting kit, 100 feet • 30.48 m length
BIG-HOSS-150	Hardware Cloth Base Mounting kit, 150 feet • 45.72 m length

The Hoistway Obstruction Shield Systems are used to prevent round and flat elevator traveling cable from repetitively striking obstructions in the hoistway and from crossing over into adjoining hoistway. Their use may help avoid possible interference and extend the life span of the installed elevator cables.

The BIG HOSS kit includes 100 ft • 30.48 m of the 1.5 ft • 0.46 m wide shielding material (1/2 in. • 13 mm mesh hardware cloth) and all the mounting hardware needed to attach the shield within the hoistway. All components are shipped in a single bag.

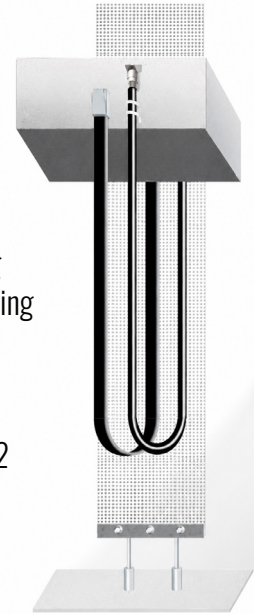

Lil-Hoss Shield System Extensions

MEGA Stock Code	Description
LIL-HOSS	Hardware Cloth Extension Mounting kit, 100 feet • 30.48 m length
LIL-HOSS-150	Hardware Cloth Extension Mounting kit, 150 feet • 45.72 m length

The LIL-HOSS kit includes an additional 100 ft • 30.48 m of the shielding material and all the mounting hardware needed to attach the shield to the top of the BIG HOSS system and walls of the hoistway.

Like the BIG HOSS, all LIL HOSS components are shipped in a single bag.

Note: Product photos are for reference only.